


**BACKUP
RINGS**

**MOLDED
FOR YOUR
INDUSTRY**

IntegriFuse™

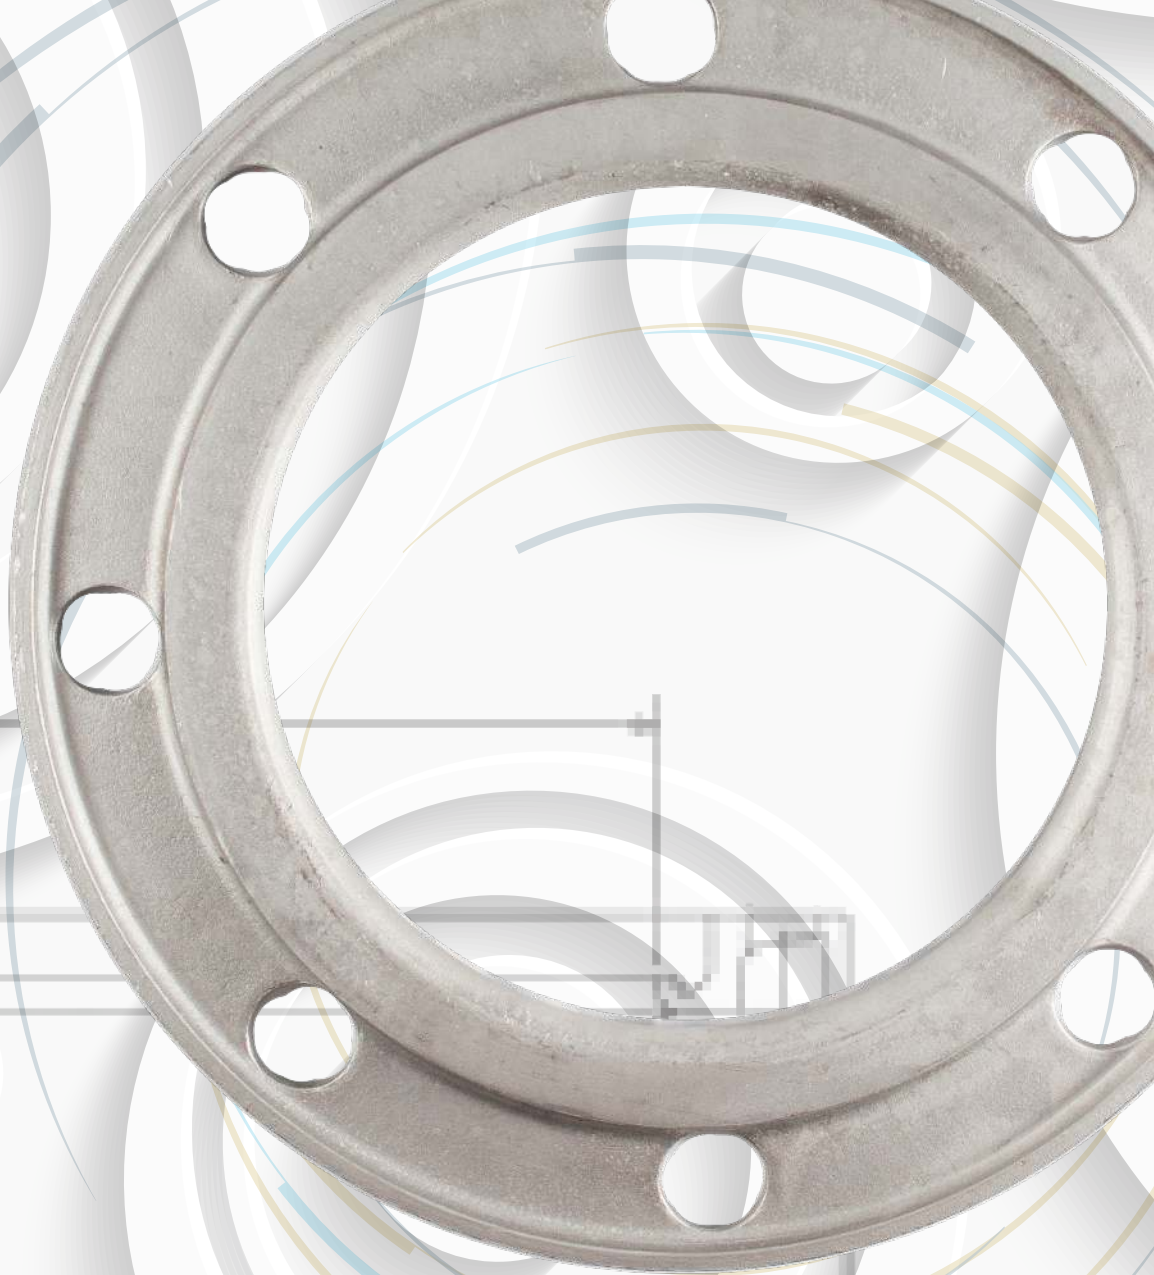

O. D.

INTEGRITY
Fusion Products, Inc.

TOLL FREE 1-888-770-6330

INTEGRITYFUSION.COM

The difference MOLDED Makes

At Integrity Fusion, our goal is to provide the highest quality products to the industry, and to our customers. This philosophy has been applied to our backup rings. Integrity Fusion offers 316 Stainless Steel Convuluted Backup Rings up through 24" IPS & flat plate style rings in 28"-36" IPS, as well as offering DIPS convuluted rings in sizes 4" - 12".

316 Stainless Steel Rings:


- ASTM A351 CF8M
- Class 150 # bolt pattern
- FM Approved

Integrity Fusion Products, Inc.
270 Parkade Court
Peachtree City, GA 30269

P: 1-888-770-6330 • P: 770-632-7530

F: 770-632-7540

E: Info@IntegrityFusion.com

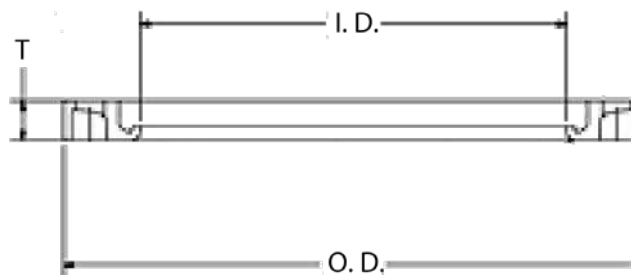

IPS-SDR 11 - 316 Stainless Steel Backup Ring SDR 11 (Standard Dimension Ratio) 200 PSI - 150# Bolt Pattern

Nominal Size	SDR	OD	ID	Thickness	# Bolt Holes	Hole Diameter	Weight	Code	Notes
2" IPS	SDR 11	6.00"	2.64"	0.45"	4	0.75"	1.7 lbs.	100241	FM 200
3" IPS	SDR 11	7.50"	3.75"	0.53"	4	0.75"	2.6 lbs.	100242	FM 200
4" IPS	SDR 11	9.00"	4.80"	0.55"	8	0.75"	3.8 lbs.	100243	FM 200
6" IPS	SDR 11	11.00"	6.90"	0.63"	8	0.88"	5.5 lbs.	100244	FM 200
8" IPS	SDR 11	13.50"	8.90"	0.85"	8	0.88"	9.5 lbs.	100245	FM 200
10" IPS	SDR 11	16.00"	11.00"	0.99"	12	1.00"	13.9 lbs.	100246	FM 200
12" IPS	SDR 11	19.00"	13.15"	1.26"	12	1.00"	16.6 lbs.	100247	FM 200
14" IPS	SDR 11	21.00"	14.42"	1.38"	12	1.13"	33.0 lbs.	100248	-
16" IPS	SDR 11	23.50"	16.47"	1.57"	16	1.13"	44.0 lbs.	100249	-
18" IPS	SDR 11	25.00"	18.50"	1.65"	16	1.25"	48.0 lbs.	100250	-
20" IPS	SDR 11	27.50"	20.50"	1.85"	20	1.25"	63.0 lbs.	100252	-
24" IPS	SDR 11	32.00"	24.60"	2.18"	20	1.38"	98.0 lbs.	100253	-
28" IPS (1)	SDR 11	36.42"	28.66"	2.76"	28	1.42"	277.8 lbs.	100265	-
30" IPS (1)	SDR 11	38.78"	30.67"	2.87"	28	1.42"	327.5 lbs.	100266	-
32" IPS (1)	SDR 11	41.73"	32.52"	-	28	1.63"	204.6 lbs.	100267	-
34" IPS (1)	SDR 11	43.74"	34.53"	-	32	1.63"	224.9 lbs.	100268	-
36" IPS (1)	SDR 11	46.06"	36.81"	3.50"	32	1.65"	520.0 lbs.	100269	-

IPS-SDR 7 - 316 Stainless Steel Backup Ring SDR 7 (Standard Dimension Ratio) 335PSI - 150# Bolt Pattern

Nominal Size	SDR	OD	ID	Thickness	# Bolt Holes	Hole Diameter	Weight	Code	Notes
4" IPS	SDR 7	9.00"	4.75"	0.72"	8	0.75"	6.00 lbs.	100272	FM 335
6" IPS	SDR 7	11.00"	6.88"	0.76"	8	0.88"	8.55 lbs.	100273	FM 335
8" IPS	SDR 7	13.50"	8.88"	0.83"	8	0.88"	12.65 lbs.	100274	FM 335
10" IPS	SDR 7	16.00"	11.00"	0.95"	12	1.00"	19.55 lbs.	100275	FM 335
12" IPS	SDR 7	19.00"	13.15"	1.22"	12	1.00"	34.55 lbs.	100276	FM 335

(1) - Flat Plate style



The difference MOLDED Makes

At Integrity Fusion, our goal is to provide the highest quality products to the industry, and to our customers. This philosophy has been applied to our backup rings. Integrity Fusion offers 316 Stainless Steel Convuluted Backup Rings up through 24" IPS & flat plate style rings in 28"-36" IPS, as well as offering DIPS convuluted rings in sizes 4" – 12".

316 Stainless Steel Rings:

- ASTM A351 CF8M
- Class 150 # bolt pattern
- FM Approved

Integrity Fusion Products, Inc.


270 Parkade Court

Peachtree City, GA 30269

P: 1-888-770-6330 • P: 770-632-7530

F: 770-632-7540

E: Info@IntegrityFusion.com

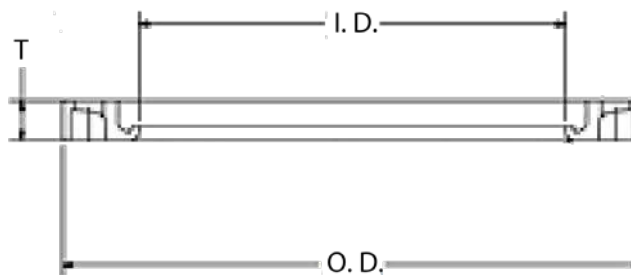

DIPS-SDR 11 - 316 Stainless Steel Backup Ring

Nominal Size	SDR	OD	ID	Thickness	# Bolt Holes	Hole Diameter	Weight	Code	Notes
4" DIPS	SDR 11	9.00"	5.00"	0.55"	8	0.75"	3.8 lbs.	100254	FM 200
6" DIPS	SDR 11	11.00"	7.10"	0.63"	8	0.88"	5.5 lbs.	100255	FM 200
8" DIPS	SDR 11	13.50"	9.20"	0.85"	8	0.88"	10.0 lbs.	100256	FM 200
10" DIPS	SDR 11	16.00"	11.30"	0.98"	12	1.00"	14.1 lbs.	100257	FM 200
12" DIPS	SDR 11	19.00"	13.45"	1.25"	12	1.00"	24.2 lbs.	100258	FM 200

SDR 11 (Standard Dimension Ratio) 200 PSI - 150# Bolt Pattern

