


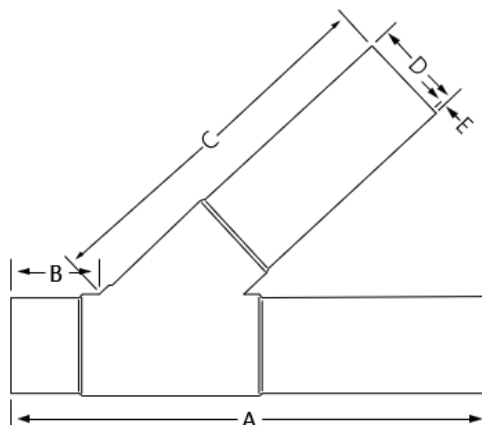

Product Family:	Injection Molded Butt Fusion Fitting	Fitting Design:	Lateral Wye
Resin Status:	NSF Listed Bi-Modal Virgin Resin	Nominal Pipe Sizes:	2" – 8"
Resin Type:	ASTM D3350 designated PE3408/PE4710/PE100	Nominal Pipe Standard:	IPS
Resin Cell Class:	445574C-CC3	Currently Available SDR's:	17, 11
Manufactured and tested to meet requirements of: ASTM D2513, ASTM D3261, ANSI/AWWA C901 & C906, FM 1613, NSF 61 For use on pipe and fittings conforming to: ASTM D2513, ASTM D3035, ASTM F-714			

For Material and Testing information, please refer to our Molded Fitting Specification Sheet.

IPS

SDR 17 (standard dimension ratio)

125 PSI (MAOP @ 73.4° F)

Nominal Size	A [in.]	B [in.]	C [in.]	D [in.]	E [in.]	Weight [lbs.]	Item Code	FM Class
2" IPS	23.74	5.28	13.10	2.38	0.22	2.05	100901	-----
3" IPS	23.92	6.00	13.46	3.50	0.32	3.35	100903	-----
4" IPS	27.96	5.74	20.50	4.50	0.41	7.05	100905	-----
6" IPS	33.74	6.18	25.54	6.63	0.60	18.95	100907	-----
8" IPS	36.50	6.50	27.70	8.63	0.78	33.25	100909	-----

IPS

SDR 11 (standard dimension ratio)

200 PSI (MAOP @ 73.4° F)

Nominal Size	A [in.]	B [in.]	C [in.]	D [in.]	E [in.]	Weight [lbs.]	Item Code	FM Class
2" IPS	23.74	5.28	13.10	2.38	0.22	2.20	100900	-----
3" IPS	23.92	6.00	13.46	3.50	0.32	4.60	100902	-----
4" IPS	27.96	5.74	20.50	4.50	0.41	9.50	100904	-----
6" IPS	33.74	6.18	25.54	6.63	0.60	25.55	100906	-----
8" IPS	36.50	6.50	27.70	8.63	0.78	44.90	100908	-----