


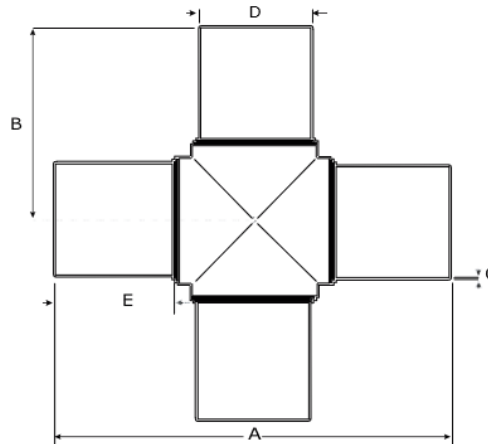

Product Family:	Injection Molded Butt Fusion Fitting	Fitting Design:	4-Way Cross
Resin Status:	NSF Listed Bi-Modal Virgin Resin	Nominal Pipe Sizes:	2" – 4"
Resin Type:	ASTM D3350 designated PE3408/PE4710/PE100	Nominal Pipe Standard:	IPS
Resin Cell Class:	445574C-CC3	Currently Available SDR's:	17, 11, 9
Manufactured and tested to meet requirements of: ASTM D2513, ASTM D3261, ANSI/AWWA C901 & C906, FM 1613, NSF 61			
For use on pipe and fittings conforming to: ASTM D2513, ASTM D3035, ASTM F-714			

For Material and Testing information, please refer to our Molded Fitting Specification Sheet.

IPS

SDR 17 (standard dimension ratio)

125 PSI (MAOP @ 73.4° F)

Nominal Size	A [in.]	B [in.]	C [in.]	D [in.]	E [in.]	Weight [lbs.]	Item Code	FM Class
2" IPS	8.82	4.41	0.18	2.38	2.56	0.65	100771	-----
3" IPS	12.34	6.17	0.26	3.50	4.42	1.75	100775	-----
4" IPS	13.52	6.78	0.33	4.50	3.82	3.20	100779	-----

IPS

SDR 11 (standard dimension ratio)

200 PSI (MAOP @ 73.4° F)

Nominal Size	A [in.]	B [in.]	C [in.]	D [in.]	E [in.]	Weight [lbs.]	Item Code	FM Class
2" IPS	8.82	4.41	0.22	2.38	2.56	0.90	100770	-----
3" IPS	12.34	6.17	0.32	3.50	4.42	2.25	100774	-----
4" IPS	13.52	6.78	0.41	4.50	3.82	4.50	100778	-----

IPS

SDR 9 (standard dimension ratio)

250 PSI (MAOP @ 73.4° F)

Nominal Size	A [in.]	B [in.]	C [in.]	D [in.]	E [in.]	Weight [lbs.]	Item Code	FM Class
2" IPS	8.82	4.41	0.26	2.38	2.56	1.00	100773	-----
3" IPS	12.34	6.17	0.39	3.50	4.42	2.80	100777	-----
4" IPS	13.52	6.78	0.50	4.50	3.82	5.20	100781	-----