


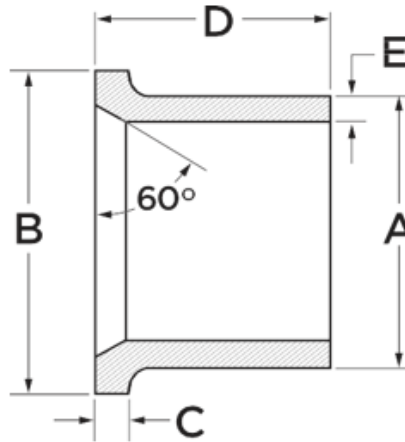

Product Family:	Injection Molded Butt Fusion Fitting	Fitting Design:	Flange Adapter
Resin Status:	NSF Listed Bi-Modal Virgin Resin	Nominal Pipe Sizes:	2" – 6"
Resin Type:	ASTM D3350 designated PE3408/PE4710/PE100	Nominal Pipe Standard:	IPS
Resin Cell Class:	445574C-CC3	Currently Available SDR's:	11
Manufactured and tested to meet requirements of:		ASTM D2513, ASTM D3261, ANSI/AWWA C901 & C906, FM 1613, NSF 61	
For use on pipe and fittings conforming to:		ASTM D2513, ASTM D3035, ASTM F-714	

For Material and Testing information, please refer to our Molded Fitting Specification Sheet.

IPS

SDR 11 (standard dimension ratio)

200 PSI (MAOP @ 73.4° F)

Nominal Size	A (OD) [in.]	B [in.]	C [in.]	D (length) [in.]	E (wall) [in.]	Weight [lbs.]	Item Code	FM Class
2" IPS	2.40	4.04	0.64	5.90	0.25	0.40	100470	-----
3" IPS	3.50	5.02	0.80	6.15	0.34	0.85	100472	-----
4" IPS	4.50	6.64	1.20	7.25	0.44	2.20	100474	-----
6" IPS	6.65	8.50	1.37	8.18	6.30	4.40	100476	-----
8" IPS	8.62	10.60	1.82	9.00	1.23	8.55	100478	-----
10" IPS	10.75	12.80	2.24	10.75	1.54	14.55	100480	-----
12" IPS	12.75	15.25	2.55	11.00	1.82	21.80	100482	-----